

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 069 528 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.01.2001 Bulletin 2001/03

(51) Int. Cl.⁷: **G06T 1/20**

(21) Application number: **00114889.9**

(22) Date of filing: **12.07.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Seiler, Larry D.
Boylston, MA 01505 (US)
- Shimha, Vikram
Lexington, MA 02173 (US)
- Gasparakis, Charidimos E.
Acton, MA 01720 (US)
- Lauer, Hugh C.
Concord, MA 01742 (US)

(30) Priority: **15.07.1999 US 353673**

(71) Applicant:
MITSUBISHI DENKI KABUSHIKI KAISHA
Tokyo 100-8310 (JP)

(74) Representative:
Pfenning, Meinig & Partner
Mozartstrasse 17
80336 München (DE)

(72) Inventors:
• Correl, Kenneth W.
Lancaster, MA 01523 (US)

(54) **Method and apparatus for mapping samples in a rendering pipeline**

(57) A method maps samples in a rendering pipeline. The samples are stored in a sample memory. Each sample has a plurality of fields. A descriptor is stored for each field in a field format register. Each sample is read from the memory into a mapping unit. The

fields are extracted from each sample according to the corresponding descriptor, and forwarded in parallel to the rendering pipeline.

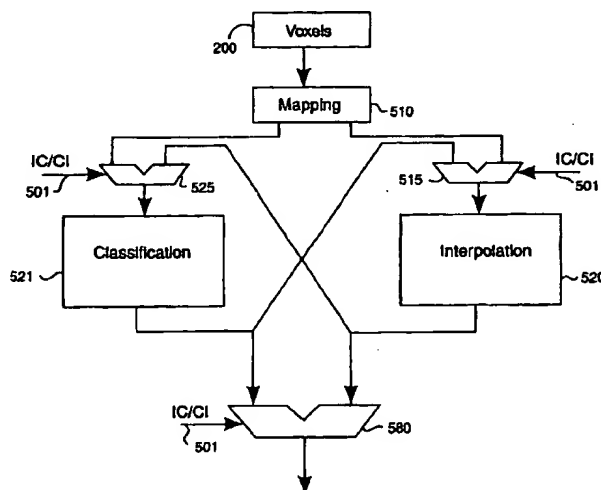


FIG. 5a

Description**FIELD OF THE INVENTION**

5 **[0001]** This invention relates generally to volume rendering, and more particularly, to classifying samples in a rendering pipeline.

BACKGROUND OF THE INVENTION

10 **[0002]** Volume rendering is often used in computer graphics applications where three-dimensional data need to be visualized. For example, the volume data are scans of physical objects, or atmospheric, geophysical or other scientific models. With volume rendering, the internal structure, as well as the external surface of physical objects and models are visualized. Voxels are usually the fundamental data items used in volume rendering. A voxel is a data item that represents attributes of a particular three-dimensional portion of the object or model.

15 **[0003]** A voxel represents some particular intensity value of the object or model, such as physical parameters, e.g., density, elasticity, velocity, to name but a few, inferred by CT, MRI, PET, SPECT, ultrasound, or other scanning means. During rendering, the voxel values are converted to pixel color and opacity (*RGBa*) values which can be projected onto a two-dimensional image plane for viewing.

20 **[0004]** One frequently used technique during the rendering process is ray casting. A set of imaginary rays are "traced" through the array of voxels. For a particular viewing orientation, the rays are cast to the image plane in either a back-to-front, or a front-to-back order. The voxel values are sampled along the rays, and various techniques are known to reduce the sampled value to pixel values.

Rendering Pipeline

25 **[0005]** Volume rendering can be done by software or hardware. In one prior art hardware implementation, as shown in simplified form in Figure 1, the hardware is arranged as a multi-stage pipeline 100, see U.S. Patent Application 09/190,643 "Fast Storage and Retrieval of Intermediate Values in a Real-Time Volume Rendering System," filed by Kappler et al. on Nov. 12, 1998. The input to the pipeline 100 is voxel stored in a voxel memory 101, and the output is pixels stored in a pixel memory or frame buffer 109. The stages can include decoding 110, interpolating 120, gradient estimating 130, classifying and shading 140, and compositing 150.

30 **[0006]** During operation of the pipeline 100, the decoder (address generator) 110 generates addresses of voxels stored in the voxel memory 101. The addresses are generated in a suitable order. Blocks of voxels are read from the memory, and presented to the pipeline for processing one at the time.

35 **[0007]** The interpolator 120 assigns values to sample points along the rays based upon voxel values in the neighborhood of the sample points. Typically, one can interpolate either voxel fields, or color-opacity fields using a predetermined interpolation mode, e.g., linearly, probabilistically, or nearest neighbor.

40 **[0008]** During gradient estimation 130, vectors (G_{UVW}) representing the direction and rate of change of voxel or sample values are estimated. Gradients with large magnitudes denote surfaces, or boundaries between, for example, types of material. The gradients are applied to shading and illumination functions to produce highlights that enhance the three-dimensional appearance.

45 **[0009]** During classification 140, color and opacity values are assigned to each sample point. During illumination 145, also known as shading, sample points are illuminated with highlights and shadows to produce a more realistic three-dimensional appearance. For example, Phong shading can be applied, see Phong, "Illumination for computer generated pictures," Communications of the ACM 18(6), pp. 49-59.

[0010] The output of the shading stage 145 is a stream of color and opacity values at sample points. This stream is fed to the compositing unit for accumulation into the pixel values of the rays. The pixel value of each ray must be accumulated one sample point at a time. Finally, after the color and opacity values of all of the sample points on an individual ray have been accumulated, the resulting pixel value of that ray is written to the pixel memory.

50 **[0011]** It will be appreciated that the order of gradient estimation, interpolation, and classification can be permuted. In fact, different prior art systems use different orders for the stages. However, in the prior art of ray-casting, the order of the stages in a particular system is fixed.

55 **[0012]** It is desired that the classification of voxels be generalized. In the prior art, voxel typically are single values or a fixed format dedicated to a specific application. Generalizing the format, will allow the pipeline to support a greater variety of applications.

SUMMARY OF THE INVENTION

[0013] A method maps samples in a rendering pipelines. The samples are stored in a sample memory. Each sample has a plurality of fields. A descriptor is stored for each field in a field format register. Each sample is read from the memory into a mapping unit. The fields are extracted from each sample according to the corresponding descriptor, and forwarded in parallel to the rendering pipeline.

[0014] The fields can overlap, and can be enumerated in any order. The fields can store intensity values or physical values, or combinations thereof. The fields are scaled to fit data paths in the pipeline. The fields can be interpolated first and classified later, are classified first and interpolated later.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Figure 1 is a block diagram of a prior art rendering pipeline;

Figure 2 is a block diagram of a multi-field voxel according to the invention;

Figure 3 is a block diagram of a voxel format register;

Figure 4 is a block diagram of a field format register;

Figure 5a is a block diagram of a configurable classification and interpolation stage of a rendering pipeline according to the invention;

Figure 5b is a detailed block diagram of the classification and interpolation stages;

Figure 6 is a block diagram of a look-up format register;

Figure 7 is a block diagram of cascaded arithmetic logic units;

Figure 8 is a block diagram of an ALU operation register;

Figures 9-11 are operations performed by the ALUs of Figure 7;

Figure 12 is a circuit diagram of a unit for opacity weighting; and

Figure 13 is a block diagram of a histogramming unit.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0016] As shown in Figure 2, a raw sample, for example, a voxel 200, to be classified according to our invention, includes a plurality of fields (F_1, \dots, F_n) 201-209. Each of the fields 201-209 is a subset of the bits in the sample. Each field is specified as an offset and width in the raw sample 200. Any of the fields can overlap as shown for fields F_1 and F_2 . The fields can be enumerated in any order.

[0017] The fields describe different attributes of a represented three-dimensional object or model. For example, if the object is a human head, then the fields 201-209 can respectively store intensity values acquired from CT, MRI, PET, SPECT, and ultrasound scans. i.e., each voxel stores five different scan intensity values in a single voxel representation, one field for each intensity value.

[0018] Some fields can be category fields related to the way the volume is segmented, e.g., bone, soft tissue, ligaments, blood, etc. For physical models, the fields can store state variables used in scientific visualization, e.g., pressure, velocity, angular momentum, elasticity, density, temperature, and viscosity. For any volume data set, the fields can also store depth, 3D stencil, shadows, fog, voxelized and embedded synthetic or drawn objects.

[0019] In addition, any of the fields can be marked for specialized processing. For example, during shading, opacity-weighted color values are modulated to emphasize surface boundaries. For a multi-field sample 200 according to our invention, the application can specify which fields are used for gradient calculations. For each component of the gradient, the application can specify which of the voxel fields to use in order to determine any of the three gradient components.

[0020] For multi-field visualization, it is often desirable to interpolate fields within voxels separately. Furthermore, each field within the voxel can have a different interpolation applied, e.g., trilinear for intensity fields, and nearest neighbor interpolation for category fields, for example.

5 [0021] It is of interest for both software and hardware applications to be able to have a common framework for classifying all special cases of voxel formats in a uniform fashion. We provide a pipelined classifier, described in greater detail below, that can map voxel field values to *RGBa* values for any transfer function.

Voxel Formats

10 [0022] We have implemented a flexible protocol for specifying a wide range of input formats for raw samples. Voxels are stored as 8, 16, 32, or larger bit quantities in a voxel memory. Voxels are partitioned into *fields*, each of which may have a different meaning for a particular application. Fields may be 4, 8, 12, 16, or other number of bits in width. In one embodiment, the fields are aligned on a four-bit boundary within the voxel. Fields larger or smaller than data paths can be scaled to fit the data paths. The format of a voxel is described in a *VoxelFormat* register 300, as shown in Figure 3
15 for an example five field voxel.

Field Descriptors

[0023] Fields of voxels are defined by descriptors of in a *FieldFormat* register 400, as shown in Figure 4. This is an 8-bit descriptor defining the *Size* 401 of the field (in 4-bit nibbles), the *Position* of the field within its voxel, (also in 4-bit nibbles), and what to do when the field has a different size than from the size for its intended use in a data path. *Control* bits 403 define the numeric format of the field, and implicitly how a field may be expanded or shrunk ("scaled") to fit the data path to which it is connected: either by repeating fraction arithmetic or by adding or re-moving bits from either the most significant or least significant end.

25 [0024] *Control* = 0: the field of the raw voxel is treated as an unsigned repeating fraction value in the range $[0...1]$; the value of the field is scaled and rounded to be a repeating fraction of the number of bits of the target data path, and as nearly equal as possible to the original value. Repeating fractional numbers are described in greater detail below.

[0025] *Control* = 1: the field of the raw voxel is treated as a signed repeating fraction value in the range $[-1, ..., +1]$. The value itself is converted as for *control* = 0 above.

30 [0026] *Control* = 2: the field of the raw voxel is expanded or truncated in its least significant bits to fit the data path. The most significant bits are preserved. This format is most useful when the magnitude of the number relative to its maximum is more important than the number of bits in its representation.

[0027] *Control* = 3: the field of the raw voxel is treated as a binary integer and the field is expanded or truncated in its most significant bits to fit the data path. The least significant bits are preserved. This is useful when the value of the field, relative to zero is more important than the number of bits. For example, when category bits represent different types of tissue, e.g., when category bits represent different types of tissue, e.g., air = 0, bone = 1, muscle = 2, etc.
35

Repeating Fraction Number Representation

40 [0028] Many graphics applications use a fixed width binary number to represent color, transparency, or other parameters that have fractional values in the range zero to one, inclusive.

[0029] Let R be the number of bits in the binary number and let V be the unsigned binary value stored in these bits. Then $F = V / (2^R - 1)$ is a rational number in the range $[0..1]$. That is, when V equals zero, F equals zero, and when V equals its largest possible value, $(2^R - 1)$, F equals one. This representation is well known in the prior art. For example,
45 the OpenGL Specification refers to it as a special kind of fixed point representation.

[0030] To clearly distinguish the representation described herein from ordinary fixed point representation, the term "repeating fractions" is used. The name term derives from the fact that expanding F into a fixed point binary fraction produces $0.VVVVVV...$, that is, a binary fraction that repeats the R -bit value V infinitely to the right of the binary point.

[0031] Repeating fractions can be represented with more than R bits and can even be signed. In that case, R is the "repeating precision" of the number, since R defines the implicit scale factor $(2^R - 1)$. This allows F to have values outside the range $[0..1]$. In this case, the binary fixed point representation consists of an integer value followed by an R -bit infinitely repeating binary value. Repeating fractions with the same precision may be added and subtracted in the same way as ordinary integers.

50 [0032] Other arithmetic operations, including changing the repeating precision, may be performed by first computing F for each repeating fraction, performing normal arithmetic, and then multiplying the resulting value by $(2^R - 1)$ for the repeating precision R of the result. More efficient forms exist for operations on repeating fractions. For example, doubling the repeating precision from R to $2R$ simply requires computing $V + (V < R)$.

Classification and Interpolation Order

[0033] As shown in Figure 5a, the pipeline according to the present invention can perform interpolation 520 and classification 521 in either order, interpolation before classification (*CI*), and classification before interpolation (*IC*). The reason for two different processing orders is as follows.

[0034] Scanners acquire sampled data by making physical measurements which typically represent an integral over a small region of space. Adjacent voxels often represent the integrals of overlapping regions. In these cases, it is more accurate to interpolate voxels first, then classify the result. In particular, a voxel at a boundary of, say, two different tissues is likely to represent an average of the physical properties of each tissue. When interpolating, all we are doing is moving the points of average. To make this useful, the classification function should present a continuous transition from between the colors and opacities assigned to the two tissue types.

[0035] Sometimes, sampled data may be pre-segmented (manually or automatically) into distinct materials, e.g., bone, muscle, cartilage, etc. Given such data, it would be inappropriate to interpolate between two differently identified tissues to obtain a third tissue that is not really there. In these cases, it is better to classify the voxels first, then interpolate the resulting colors. This is not so much an average of the physical properties of adjacent tissue types, but rather a blend of the colors at their boundaries.

[0036] Therefore, two control signals, *IC* and *CI* 501, invoke these two modes, respectively. The control signals select inputs for multiplexers 515, 525, and 580. Each control signal causes a volume to be rendered according to the control signals. If the fields are first interpolated, then those fields which are not twelve bits wide are scaled to twelve bits according to the *Control* bits 403 of their respective field descriptors 400. The results are then routed to the interpolators 520, which produce interpolated voxel fields.

[0037] It should be noted that in special cases *IC/CI* can be set to complete bypass either of the classification or interpolation stages. For example, a volume data set that is "preclassified" i.e., *RGBa* are already assigned to the voxel fields, does not need to pass through the classification stage, it is sufficient to only interpolate. Conversely, it may be desired to classify a volume data set without interpolation to obtain *RGBa* values.

Classification Stage

[0038] Figure 5b shows the classification and interpolation stages in greater detail. Typically, the input to the interpolation stage 520 and the classification stages 521 is raw voxels 200, and the output is opacity-weighted *RGBa* samples 299.

[0039] A voxel mapping unit 510 uses the format registers 300 and 400, as described above, to extract fields from the voxels. Both the classification stage and the interpolation stage, described in detail below, process the multiple fields independently and in parallel. That is, each stage can be considered to fork into, for example, four pipelines, one for each field.

[0040] The multiplexers 515, 525, and 580 select the order of processing through the interpolation and classification stages. Three scalars 531-533 are coupled to the mapping units and the interpolators by multiplexers 525. The scalars adjust the size of the extracted fields to fit the data paths. The output of the scalars are used to index look-up tables (LUT-0, ..., LUT-3) 541-544. In a preferred embodiment, one 4096x36 and three 256x36 look-up tables are used.

[0041] In the present embodiment, there is a fixed relationship between fields and look-up tables in the classification stage. *Field0* is used as an index to look-up values in *LookupTable0* (a 256-entry table) 541, *field1* is used as an index to look-up values in *LookupTable1* (another 256-entry table) 542, *field2* is used as an index to look-up values in *LookupTable2* (a third 256-entry table) 543, and *field3* is used as an index to look-up values in *LookupTable3* (the 4K-entry table) 544. In the case that a field of 12 or more bits is applied to a 256-entry look-up table, the field is scaled down to eight bits. The method of scaling is governed by the *FieldControl* bits 403, e.g., *Field0.Control*, *Field1.Control*, and *Field2.Control*, respectively, as shown in Figure 5.

[0042] If fields 201-204 are first classified, then the fields are immediately converted to eight or twelve bits, and multiplexed directly to the corresponding look-up tables, i.e., *Field0* 201 to *LookupTable0* 541, *Field1* 202 to *LookupTable1* 542, *Field2* 203 to *LookupTable2* 543, all 256-entry tables, and *Field3* 204 to *LookupTable3* (a 4096-entry table) 544.

[0043] The outputs of the look-up tables, via multiplexers 545, are processed by corresponding field mapping units 551-554 described in detail below. The output of the field mapping units are combined by a cascading network of arithmetic logic units (ALU) 560 to produce the opacity-weighted samples 299.

[0044] After classification, the results are routed by a path 516 to the multiplexer 515 at the top of the interpolators 520, and then on to the rest of the rendering pipeline.

[0045] Any look-up table may be bypassed under the control of the *Bypass0-Bypass3* signals. Each *Bypass* signal is a two bit signal, and is associated with a particular field of the raw or interpolated voxel. When the *Bypass* signal is zero (00), classification proceeds normally by using the raw or interpolated voxel field as an index into the look-up table 541-544. If the *Bypass* signal is one (01), then the raw or interpolated voxel field is used in place of the looked up entry.

If the *Bypass* signal is two (10), then the look-up table is used to gather a histogram of values of the raw or interpolated voxel field as described in greater detail below.

[0046] In the case that a field is bypassed, the raw or interpolated voxel field is expanded from its 12-bit internal representation to a 36-bit wide quantity by prepending the hexadecimal value 0x100000 to its high-order bits.

Look-up Table Format Registers

[0047] Entries in each look-up table are 36-bits wide in a preferred embodiment. The classification stage allows a flexible protocol for specifying a wide range of formats for look-up table entries, unlike the prior art. Look-up tables allow flexible classification schemes, including different levels of precision for different fields. Typically, the output of the look-up tables is RGB values, although other values, such as luminance can also be looked-up.

[0048] These formats are specified by the four *LookupTableFormat* registers 600 as shown in Figure 6. Each format register defines the positions of the red, green, blue, and alpha fields 401-404 within a look-up table entry, using the same kinds of field descriptors as for voxel formats, see Figure 4. The descriptors are applied in the *LUT* field map units 551-554 of Figure 5.

[0049] For example, a typical table format of eight bits each of red, green, and blue, plus twelve bits of alpha could be expressed by the following:

Red.Position= 0;	Red.Size = 1;	Red.Control = 0
Green.Position= 2;	Green.Size = 1;	Green.Control = 0
Blue.Position= 4;	Blue.Size = 1;	Blue.Control = 0
Alpha.Position= 6;	Alpha.Size =2;	Alpha.Control = 0

[0050] Note, although the fields of a look-up table entry are named after the primary colors, in fact, they may be used for other colors or purposes.

[0051] However, the alpha transparency value is a distinguished field, and is used in the compositing stage for blending color values.

[0052] Note that each *LookupTableFormat* register 600 applies to the bypassed fields as well as to the result that is looked up. By this means, a bypassed value can be routed to one or more of the *RGBa* signals that the connect to the following ALUs 560. In addition, constant values zero and one can also be routed to one or more of the *RGBa* signals.

Combining Look-up Result

[0053] Before we describe how look-up results are combined by the arithmetic logic units 560 after look-up in tables 551-554, we first consider a special case, a transfer function for opacity correction as described by Lichtenbelt et al. in "Introduction to Volume Rendering," Hewlett-Packard Professional Books, Prentice-Hall, p. 89, 1998:

$$a_i = O (I_i, |\nabla I_i|, \dots, \dots, \dots),$$

where $O(\dots)$ is the opacity transfer function, and $|\nabla|$ is the local gradient magnitude. This function can be expanded to:

$$a = \sum_{m,n} a_{mn} * f_m(I) g_n(|\nabla I|),$$

where Σ stands for addition, and $*$ indicates a product. This transfer function is a doubly infinite sum involving products of basis functions for each term.

[0054] The sum can be truncated according to the sampling frequency of the volume data set. However, even if finite, the expanded form of the sum needs to involve only a few terms to be useful.

[0055] In what follows, we proposed a fixed number of generalized "summands," which can be combined with arbitrary operations, logical or arithmetical. In general, voxel V 200 can be formulated as:

$$V = (F_0, F_1, \dots, F_n),$$

where F_0, \dots, F_n are the multiple fields 201-209 of Figure 2. A look-up table (LUT) L_i acts on attribute values stored in

each field F_i to produce corresponding pixel values, for example, $RGBa_i$ values:

$$L_i : v \rightarrow RGBa_i(v), v \in F_i.$$

- 5 This notation indicates that each look-up table produces the partial $RGBa$ contribution of a given voxel field. We now combine those contributions, using logical or arithmetic operations. We denote by ${}^{**}ij$ the operator that combines $RGBa_i$ with $RGBa_j$, for example:

$$RGBa_i {}^{**}ij RGBa_j \rightarrow RGBa_{(ij)}$$

10

This means that the operator ${}^{**}ij$, in reality, is the tensor product of four operators, one for each of the four components of the $RGBa$ value.

- [0056] This iteratively defines a tree. Each node in the tree is the contraction of at least two parent nodes. A good compromise between full generality and realistic applications is achieved by using a fixed-grammar, variable width tree 700 of ALU's 560 as shown in Figure 7, where the look-up tables (LUT_0, \dots, LUT_3) 541-544 are for the corresponding fields (F_0, \dots, F_3), and the respective combinatorial operators are ${}^{*}_{32}$, ${}^{*}_{10}$, and ${}^{*}_{(32)(10)}$, where the subscripts denote the order of combination of the fields. In other words, the tree of ALU's implements:

$$V = (F_3, F_2, F_1, F_0) \rightarrow (L_3(F_3) {}^{*}_{(32)} L_2(F_2)) {}^{*}_{(32)(10)} (L_1(F_1) {}^{*}_{10} L_0(F_0))$$

20

As shown clearly in Figure 7, the various ** operators are composite operators, comprising four component-wise operations, one for each of the color-opacity channels. Useful operators, per $RGBa$ channel, are logical (Boolean) operations, and arithmetic operations, such as, multiplication, multiplication of the complements with respect to one, addition, average, minimum, maximum, among others. Note, some of the operators, could be unitary operators, such as, negation, in which case the operator only applies to a single parent node.

25

[0057] As an advantage, we use a fixed grammar, i.e., a fixed number of nodes at fixed positions in the tree 700. Moreover, we provide the ability to "shuffle" voxel fields during decoding by the mapping unit 510. A field F_i to be looked-up in LUT_i is defined by an offset and width in the voxel 200. The offset and width can be set in registers as the voxel is decoded. The offset and width can be used to shift and mask the bits of the voxel to extract the appropriate field.

30

[0058] It should now be apparent that our fixed width grammar can accommodate most useful rendering cases. In the case of $RGBa$ volumes, where each voxel is of the form (R, G, B, a) , the look-up tables can be arbitrary functions, and all the ** operators can be ${}^{*}_{OR} = (OR \otimes OR \otimes OR \otimes OR)$. Then for the color red,

$$r \rightarrow L_3(r) = (f_3(r), 0, 0, 0),$$

35

and for the color green,

$$g \rightarrow L_2(g) = (0, f_2(g), 0, 0),$$

40 and

$$L_3(r) {}^{*}_{OR} L_2(g) = L_{32}(r, g) = (f_3(r), f_2(g), 0, 0).$$

[0059] Similarly, for blue

45

$$b \rightarrow L_1(b) = (0, 0, f_1(b), 0),$$

and for opacity

50

$$a \rightarrow L_0(a) = (0, 0, 0, f_0(a)),$$

and

$$L_1(b) {}^{*}_{OR} L_0(a) = L_{10}(b, a) = (0, 0, f_1(b), f_0(a)).$$

55

[0060] The final result is:

$$L_{32} {}^{*}_{OR} L_{10} = (f_3(r), f_2(g), f_1(b), f_0(a)).$$

[0061] Similarly, if one of the voxel fields is a segmentation field, it is possible to modify the voxel's *RGBA* assignment by a segmentation dependent rule. For concreteness, consider the following example.

[0062] Let (s, i) be a dual field, where s is a category index and i an intensity index. If:

$$L_1(s=1) = (1, 0, 0, 1), L_0(i) = (R, G, B, a), *_{10} = AND \otimes AND \otimes AND \otimes OR,$$

then

$$L_1(s=1) *_{10} L_1(i) = (r, 0, 0, 1).$$

[0063] The result is that the voxels that belong to the category $s=1$ are made opaque, and only the red component of the voxel's classified intensity is retained. It should be clear that the possible operators one can use is practically unlimited.

15 Arithmetic Logic Units (ALUs)

[0064] Therefore, in order to generalize the transfer function, the outputs of the *LUT field map* units 551-554, whether they represent looked up entries or bypassed fields, are combined by the hierarchy of arithmetic-logical units (ALUs) 560, as shown in Figure 5. The outputs of LUT-0 and LUT-1 are combined by ALU-0, the outputs of LUT-2 and LUT-3 are combined by ALU-1, and the outputs of ALU-0 and ALU-1 are combined by ALU-2.

[0065] Each ALU in Figure 5 is, in fact, four independently controlled, 12-bit ALUs, one each for the red, green, blue, and alpha fields selected by the *LUT field maps* 551-554. Each field of the input of the ALU is processed independently. That is, there are no inter-field operations. The opcodes for each of the fields of each of the ALUs are specified in *ALU* registers 800, as shown in Figure 8.

[0066] Each ALU is controlled by an 8-bit opcode specifying the following operations: Sixteen possible logical operations on two inputs, encoded into the first sixteen opcode values. Sixteen addition operations on two inputs. These implement the sum or difference, clamped to one. Either or both of the inputs and/or the result may be inverted; in repeating fraction arithmetic, this is equivalent to subtracting from one. Thirty-two multiplication operations on two inputs.

[0067] Let $pqrst$ be the five low-order bits of the opcode and let A and B be the two inputs. Then:

$$Result = p \text{ XOR } clamp((t \text{ XOR } A) * (s \text{ XOR } B)) << (qr)$$

That is, conditionally complement A and B depending on the values of bits t and s , then multiply, then shift left by 0, 1, 2, or 3 bits as selected by bits qr , then round that result and clamp it to [0...4095], and finally conditionally complement that result based on the value of bit p .

ALU Operations

[0068] As shown in Figure 9, the opcodes support sixteen possible logical (Boolean) operations 900 on two inputs, encoded into the first sixteen opcode values. In Figures 9-11, the symbols with a bar above indicate the negative, e.g. \bar{E} would mean 1- E . Figures 10 and 11 show possible arithmetic operations including addition, subtraction, minimum, maximum, multiplication, shifting, and complementing either the operands or shifted results.

[0069] In particular one can perform set-theory operations, such as, find the union of all segments belonging to categories c_1, c_2 , and make their opacity zero, i.e., make those two segments invisible.

[0070] As examples of the use of arithmetical operators, consider the following operators, which can be useful in combining two different scans of the same object together:

$$A * _c B = \max \{A, B\}, A * _t B = 1 - (1 - A)(1 - B).$$

[0071] One can use the $*_c$ operator for each color component, and the $*_t$ operator for the opacity:

$$RGBA_1 (*_c, *_c, *_c, *_t) RGBA_2.$$

[0072] In another example, a volume is combined with a shadow map of the same volume, when illuminated by arbitrary light sources. The multi-field voxel is then (s, i) , where s now stands for the shadow value, which is the opacity accumulated at the voxel position, when the volume is illuminated by the light sources. Simple shadowing can be performed by:

$$c' = (1-s) * c.$$

[0073] In terms of the combiner 560, consider the operation:

$$*_{sh} = (x, x, x, x),$$

where "x" is the usual multiplication:

$$s \rightarrow L_1(s) = (1-s, 1-s, 1-s, 1),$$

and

$$i \rightarrow L_0(i) = (R, G, B, a),$$

and conclude that

$$L_1(s) *_{sh} L_0(i) = ((1-s)R, (1-s)G, (1-s)B, a).$$

[0074] If we also give the normal field magnitude data as an input, then we can use the classifier to further modulate the *RGBa* above by the edgeness value.

[0075] A further application where our classifier can be used is depth shading, where depth is considered as a generalization of the concept of shadow, and apply equations similar to the above.

Opacity Weighting

[0076] After the outputs of the look-up tables are combined by the ALUs, the resulting red, green, and blue values may be optionally multiplied by the alpha value to produce the opacity-weighted color values 299. This is important for properly illuminating and compositing color values. Also, correct interpolation of color (*RGBa* values) components requires that they be weighted for opacity when classification takes place before interpolation. This is to prevent voxels that have zero opacity from contributing the sample's color.

[0077] The opacity weighting function is shown in more detail in Figure 12. When the *OpacityWeight* 1201 is zero, the red, green, and blue color fields of the output of the classification stage pass through unchanged. When the *OpacityWeight* is one, each of the red, green, and blue fields is multiplied by the alpha field.

Interpolation Stage

[0078] The interpolation stage 520, like the classification stage processes the multiple fields independently and in parallel. When the IC/CI signal 501 causes interpolation to precede classification, the fields of the raw voxel are independently interpolated, then used as indices to their corresponding tables. If however, the IC/CI signal causes classification to precede interpolation, then the red, green, blue, and alpha values are interpolated as four independent fields.

[0079] Interpolation function that can be used include trilinear, Lagrangian, nearest neighbor, etc. Any of these functions can be applied to any field during the parallel processing.

Histograms

[0080] As shown in Figure 13, the classification look-up tables 541-544 can also be used for collecting histograms 1300 of raw or interpolated voxel fields 1301. In other words, the table can operate in two modes. When classifying individual voxels, the look-up tables are preloaded with classification entries before a rendering pass. The value of each voxel field is used to index an entry of a corresponding table, and the value of the entry, typically a RGB value, is returned.

[0081] When classifying entire volume data sets, the entries in the look-up tables are all initialized to zero values. The value of each voxel field is used to index an entry of a corresponding table, and the entry is incremented. When all voxels have been classified, entries of the table essentially form a histogram of voxel values. By invoking the by-pass function, the tables can be read out. The histograms indicate relative frequency of different voxel values. The histograms can be used to better segment the volume data set.

[0082] It is to be understood that various other adaptations and modifications may be made within the spirit and scope of the invention. Therefore, it is the object of the appended claims to cover all such variations and modifications as come within the true spirit and scope of the invention.

Claims

1. A method for mapping samples in a rendering pipelines, comprising the steps of:
5 storing the samples in a memory, each sample having a plurality of fields;
storing a descriptor for each field in a field format register;
reading each sample from the memory into a mapping unit;
extracting the fields from each sample according to the corresponding descriptor; and
forwarding the extracted fields in parallel to the rendering pipeline.
10
2. The method of claim 1 wherein two adjacent fields overlap.
3. The method of claim 1 wherein the plurality of fields are enumerated in any order.
- 15 4. The method of claim 1 wherein a particular field of the sample stores an intensity value of a scan.
5. The method of claim 1 wherein a particular field of the sample stores a segmentation value.
6. The method of claim 1 wherein a particular field stores a physical value.
20
7. The method of claim 1 wherein the descriptor includes a size of the field, a position of the field in the sample, and control information.
8. The method of claim 7 wherein the control information determines the numeric format of the field.
25
9. The method of claim 8 wherein the field is scaled to fit a target data path according to the numeric format.
10. The method of claim 7 wherein the control information treats the corresponding field as an unsigned repeating fraction value in the range $[0...1]$.
30
11. The method of claim 7 wherein the control information treats the corresponding field as a signed repeating fraction value in the range $[-1...+1]$.
12. The method of claim 9 wherein the numeric format is a binary integer.
35
13. The method of claim 1 wherein the plurality of fields represent color and opacity values.
14. The method of claim 1 wherein each field is classified in parallel by a corresponding look-up table.
- 40 15. The method of claim 1 wherein each field is classified and interpolated, and the order of classification and interpolation is selectable.
16. The method of claim 14 wherein the classified and interpolated fields are combined into a colored sample.
- 45 17. The method of claim 15 wherein the combining is performed by a plurality of arithmetic logic units.
18. The method of claim 1 wherein each sample is a voxel.
19. An apparatus for mapping samples in a rendering pipeline, comprising:
50 a memory storing samples, each sample having a plurality of fields;
a register storing a descriptor for each field of the sample; and
a mapping unit reading each sample from the memory, extracting the fields from each sample according to the descriptor, and forwarding the extracted fields in parallel to the rendering pipeline.
55
20. The apparatus of claim 19 wherein the descriptor includes a size of the field, a position of the field in the sample, and control information.

21. The apparatus of claim 19 further comprising:

a plurality of multiplexers for selecting an order for classifying and interpolating the plurality of fields.

5

10

15

20

25

30


35

40

45

50

55

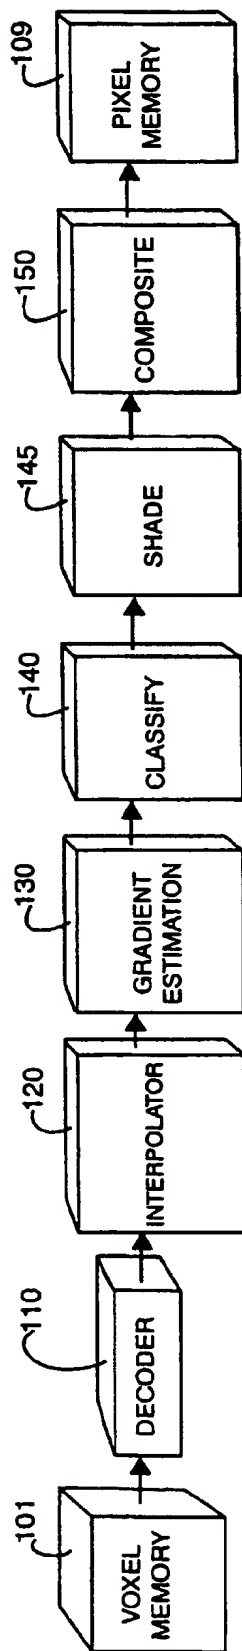

100

FIG. 1

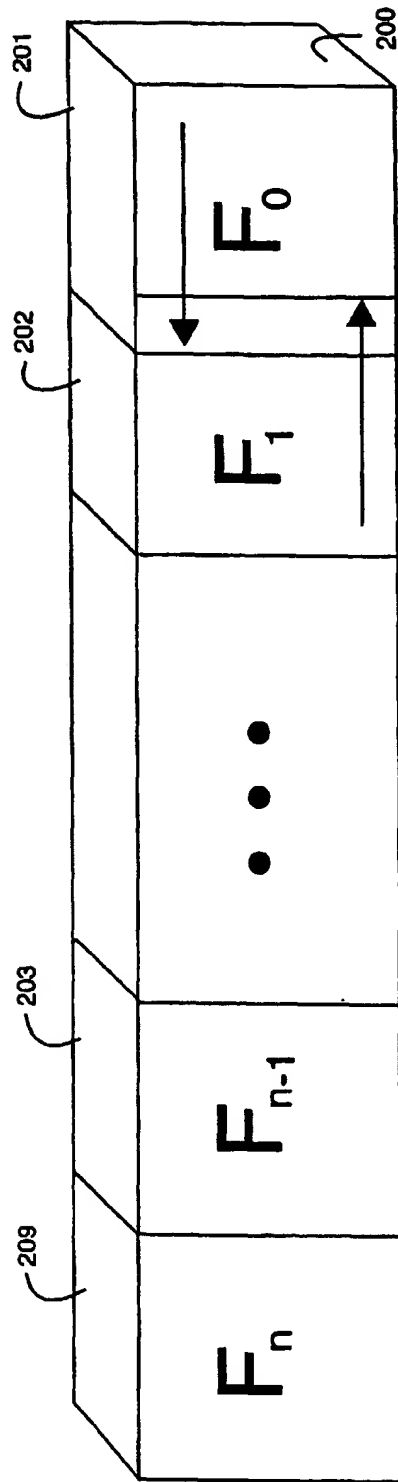


FIG. 2

300

VoxelFormat Register	
Field Name	Description
Field4	Descriptor of Field 4
Field3	Descriptor of Field 3
Field2	Descriptor of Field 2
Field1	Descriptor of Field 1
Field0	Descriptor of Field 0

FIG. 3

Field Format Register	
Descriptor Entry	Description
Control	0: Scale field as unsigned repeating fraction in range of [0,...,1]
	1: Scale field as signed repeating fraction in range of [-1,...,+1]
	2: Scale field in least significant bits
	3: Scale field in most significant bits
Size	Number of bits in field
Position	Starting position of field

FIG. 4


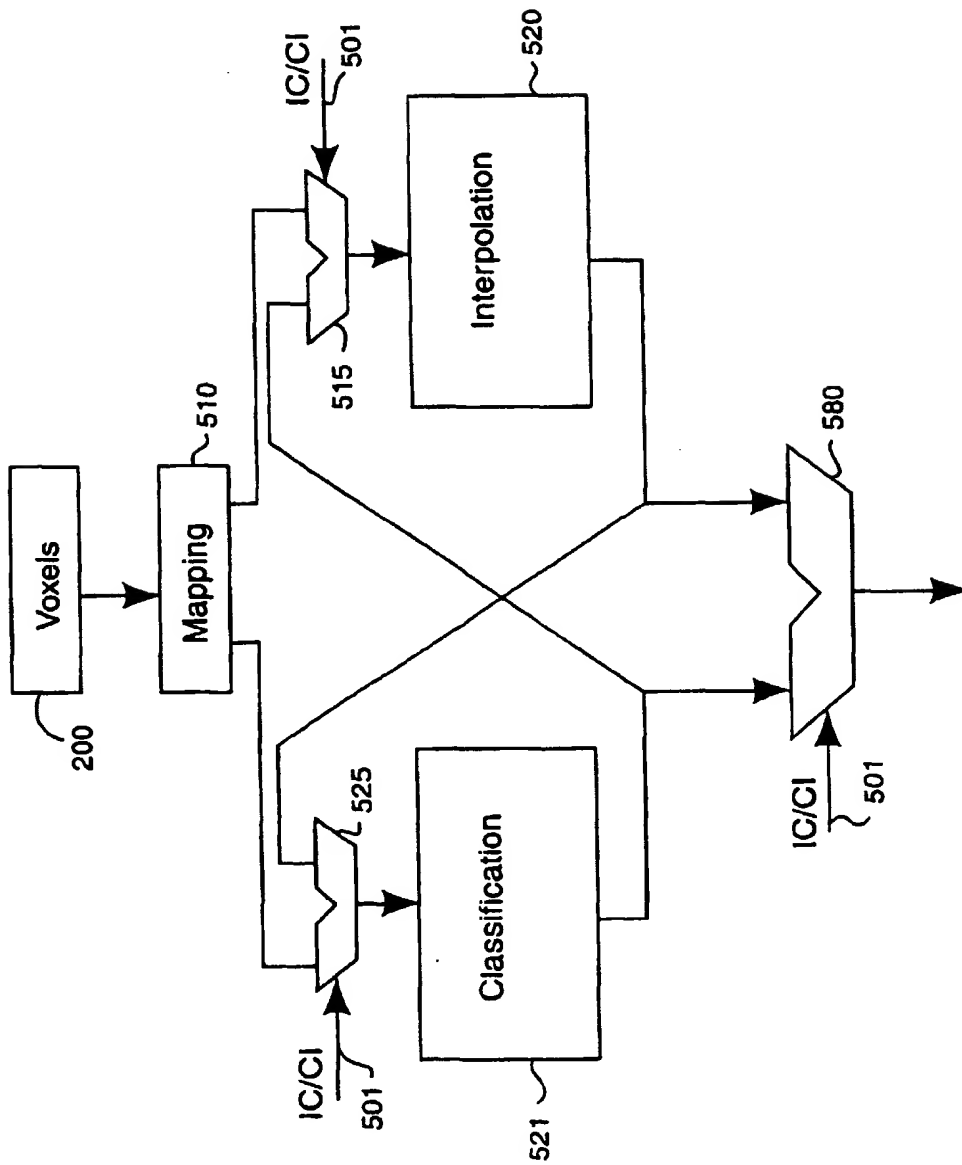


FIG. 5a

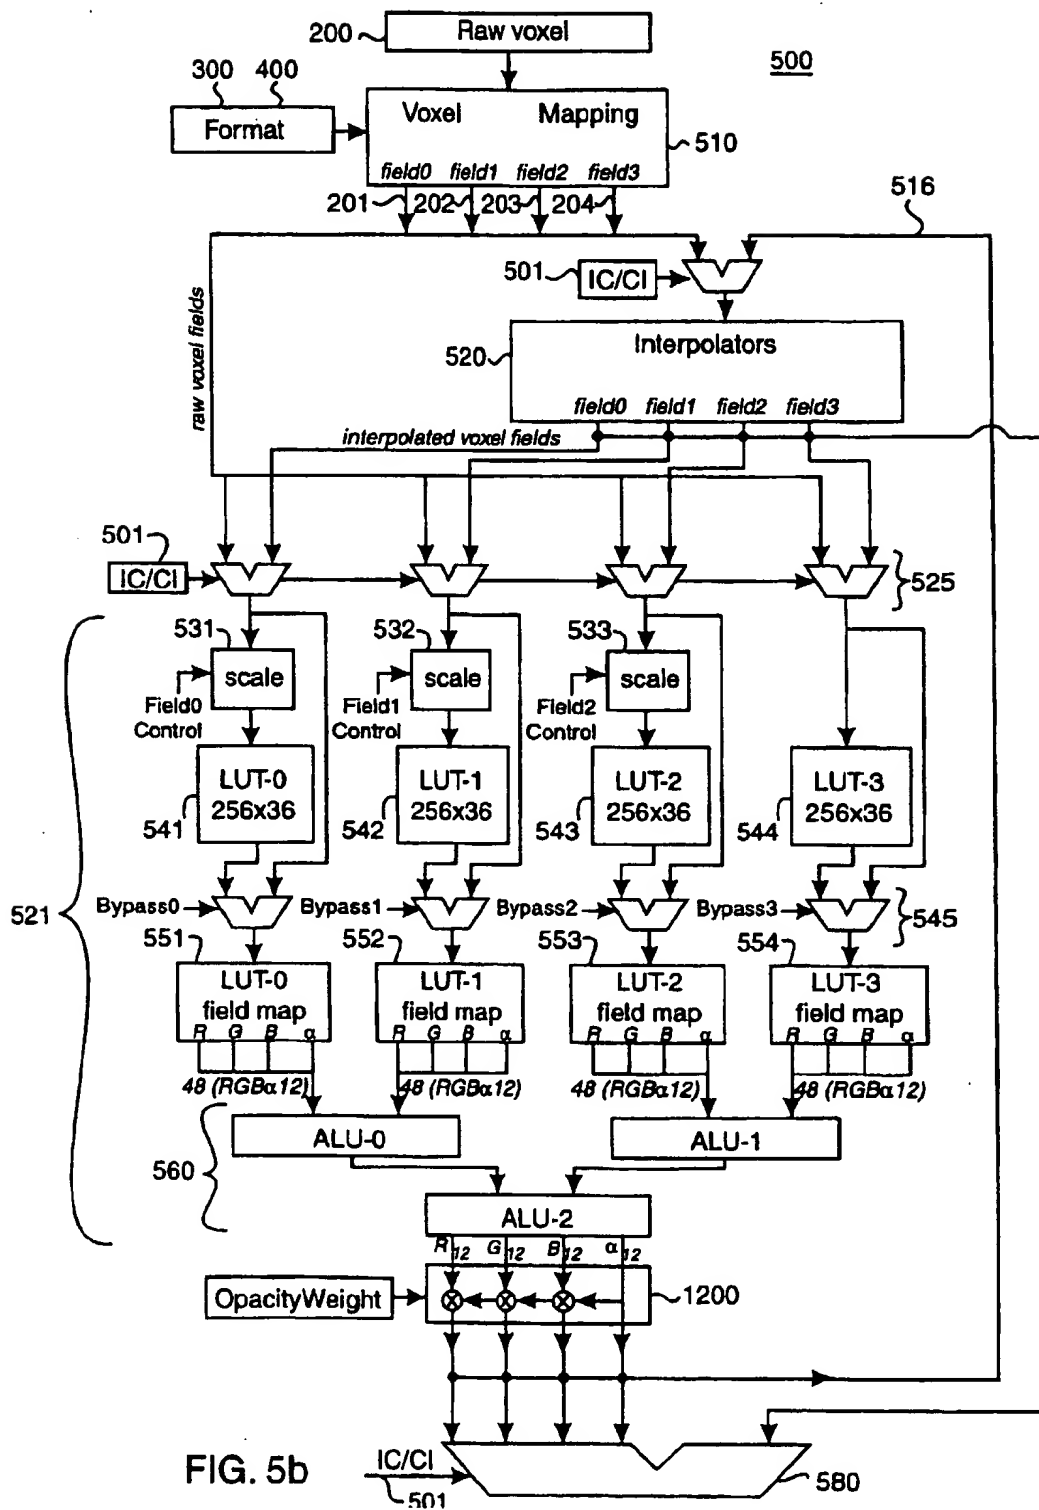

600

Lookup Table Format			
Bits	Field Name	Format	Description
31:24	Alpha	field	Description of alpha field of LUT entry
23:16	Blue	field	Description of blue field of LUT entry
15:8	Green	field	Description of green field of LUT entry
7:0	Red	field	Description of red field of LUT entry

~404
~403
~402
~401

FIG. 6

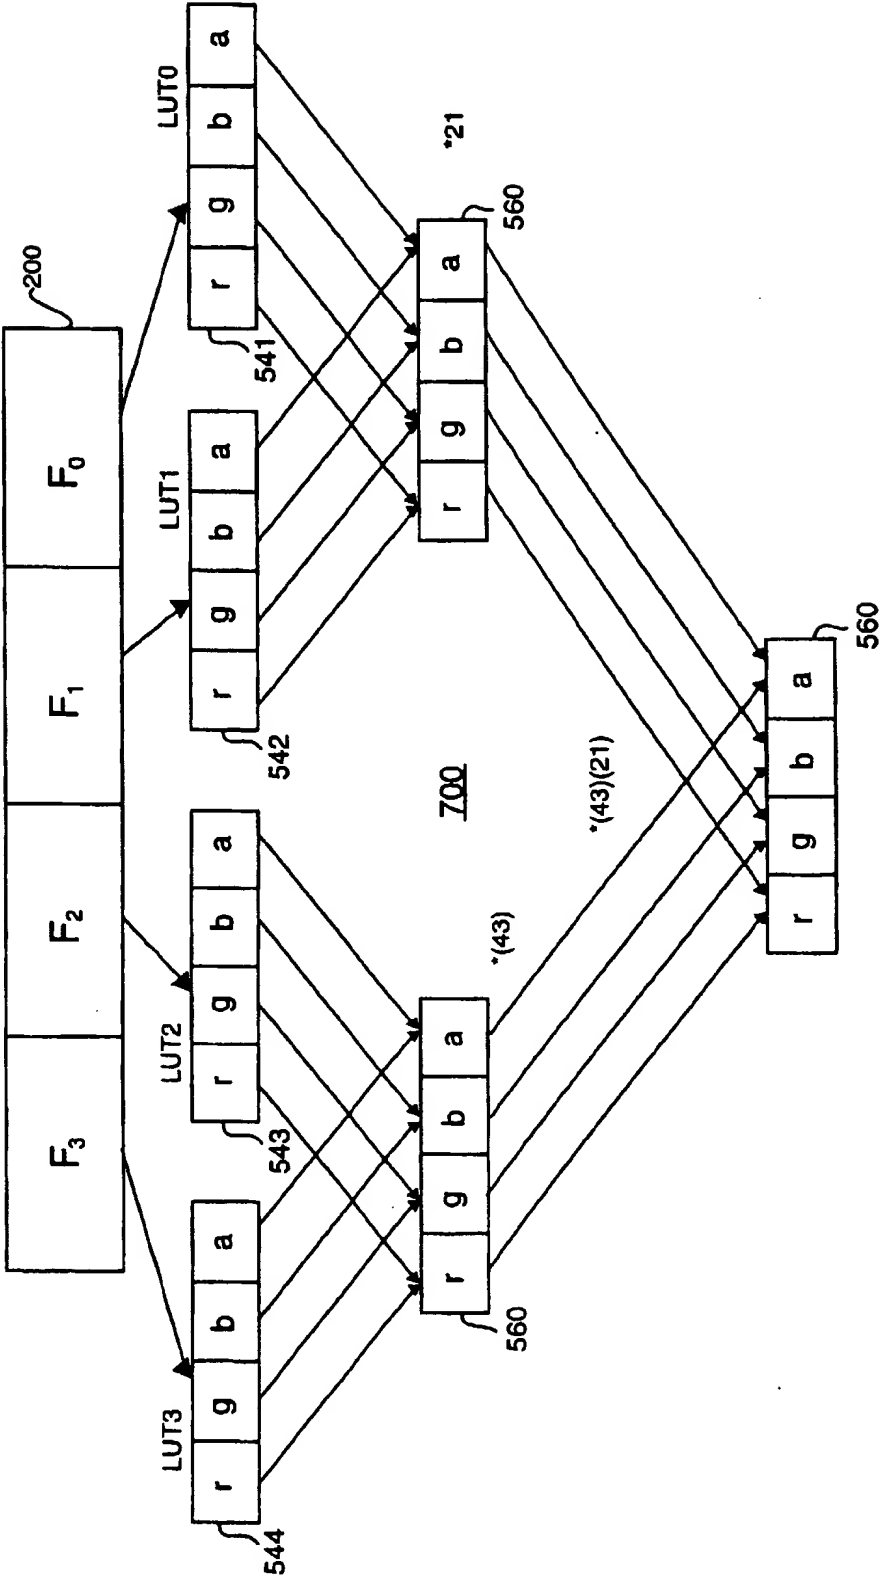


FIG. 7

800

ALU		
Bits	Field Name	Description
31:24	AlphaOp	0-15: Boolean operations 16-31: Addition operations 32-63: Multiplication operations 64-255: reserved
23:16	BlueOp	
15:0	GreenOp	
7:0	RedOp	

FIG. 8

900

Code	Name	Operation	Code	Name	Operation
0	clear	O	8	nor	$\overline{A \wedge B}$
1	and	$A \wedge B$	9	equiv	$\overline{A \oplus B}$
2	and reverse	$A \wedge \overline{B}$	10	invert	B
3	copy	A	11	or_reverse	$A \vee \overline{B}$
4	and inverted	$\overline{A \wedge B}$	12	copy_inverted	A
5	noop	B	13	or_inverter	$\overline{A \vee B}$
6	xor	$A \oplus B$	14	and	$\overline{A \wedge B}$
7	or	$A \vee B$	15	set	I

FIG. 9

Code	Operation	Canonical Form	Code	Min Operation	Max Operation
16	$(A + B)'_0$	$\min(A + B, 1)$	24	$\min(A, B)$	$\max(\bar{A}, \bar{B})$
17	$(1 + A - B)'_0$	$\min(A + \bar{B}, 1)$	25	$\min(A, \bar{B})$	$\max(\bar{A}, B)$
18	$(1 + B - A)'_0$	$\min(\bar{A} + B, 1)$	26	$\min(\bar{A}, B)$	$\max(A, \bar{B})$
19	$(2 - A - B)'_0$	$\min(\bar{A} + \bar{B}, 1)$	27	$\min(\bar{A}, \bar{B})$	$\max(A, B)$
20	$(1 - A - B)'_0$	$\min(A + B, 1)$	28	$\min(A, B)$	$\max(\bar{A}, \bar{B})$
21	$(B - A)'_0$	$\min(A + \bar{B}, 1)$	29	$\min(A, \bar{B})$	$\max(\bar{A}, B)$
22	$(A - B)'_0$	$\min(\bar{A} + B, 1)$	30	$\min(\bar{A}, B)$	$\max(A, \bar{B})$
23	$(A + B - 1)'_0$	$\min(\bar{A} + \bar{B}, 1)$	31	$\min(\bar{A}, \bar{B})$	$\max(A, B)$

FIG. 10

Code	Operation	Code	Operation	Code	Operation	Code	Operation
32	$AB1'_0$	32	$4AB1'_0$	24	$AB1'_0$	24	$4AB1'_0$
33	$\overline{AB}1'_0$	33	$\overline{AB}1'_0$	25	$AB1'_0$	25	$\overline{AB}1'_0$
34	$\overline{AB}1'_0$	34	$\overline{AB}1'_0$	26	$\overline{AB}1'_0$	26	$\overline{AB}1'_0$
35	$\overline{AB}1'_0$	35	$\overline{AB}1'_0$	27	$\overline{AB}1'_0$	27	$\overline{AB}1'_0$
36	$2AB1'_0$	36	$8AB1'_0$	28	$2AB1'_0$	28	$8AB1'_0$
37	$2\overline{AB}1'_0$	37	$8\overline{AB}1'_0$	29	$2\overline{AB}1'_0$	29	$8\overline{AB}1'_0$
38	$2\overline{AB}1'_0$	38	$8\overline{AB}1'_0$	30	$2AB1'_0$	30	$8\overline{AB}1'_0$
39	$2\overline{AB}1'_0$	39	$8\overline{AB}1'_0$	31	$2AB1'_0$	31	$8\overline{AB}1'_0$

FIG. 11

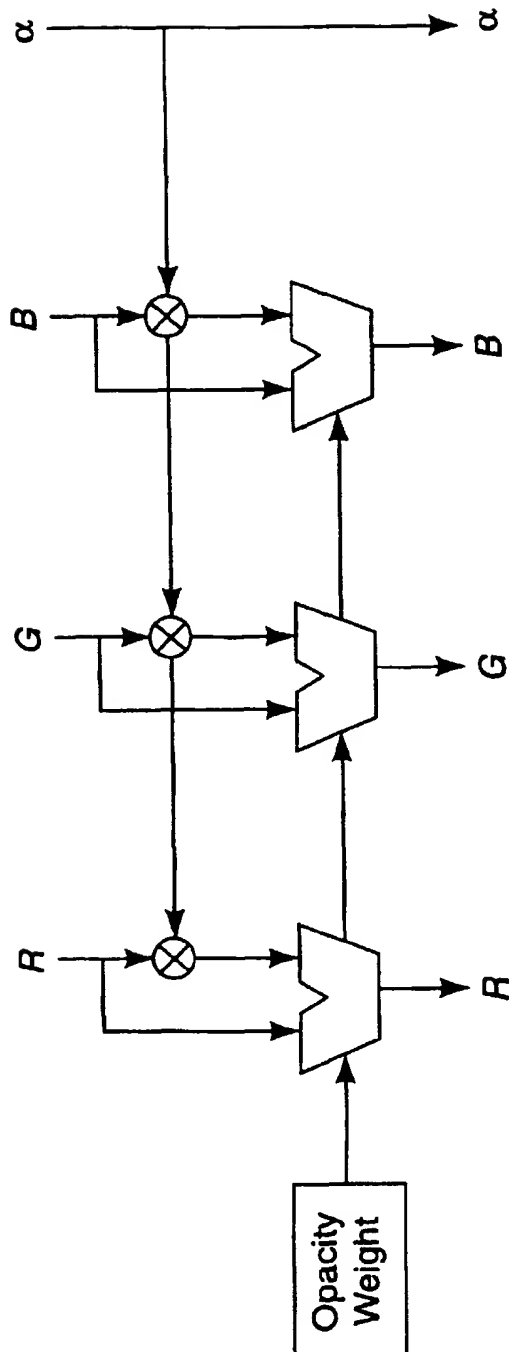


FIG. 12


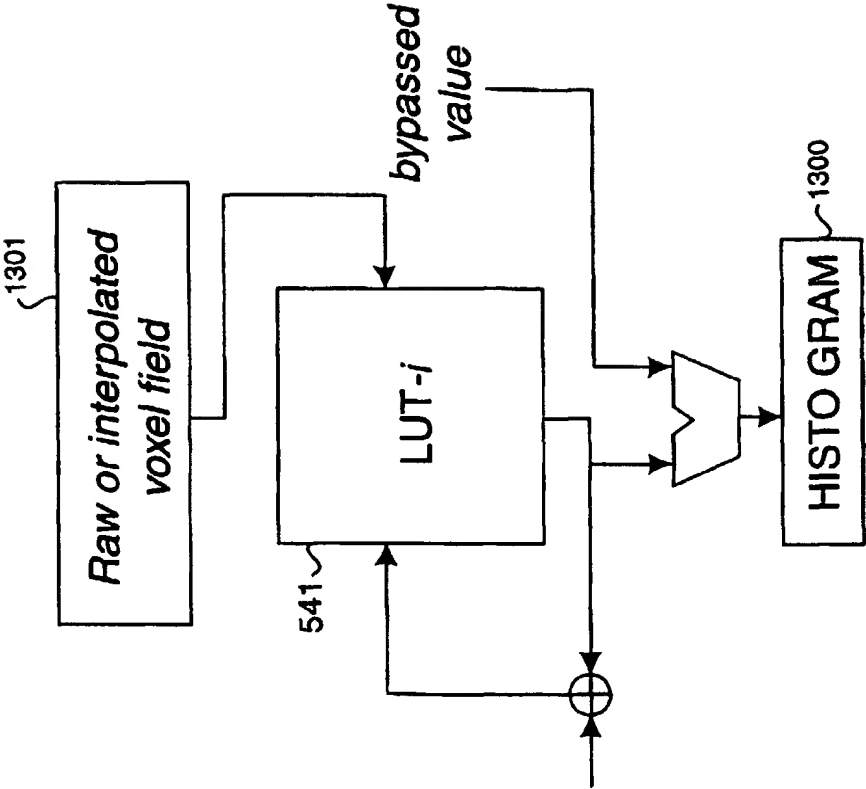


FIG. 13



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 069 528 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
23.07.2003 Bulletin 2003/30

(51) Int Cl.7: G06T 1/20, G06T 15/00

(43) Date of publication A2:
17.01.2001 Bulletin 2001/03

(21) Application number: 00114889.9

(22) Date of filing: 12.07.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- Seiler, Larry D.
Boylston, MA 01505 (US)
- Shimha, Vikram
Lexington, MA 02173 (US)
- Gasparakis, Charidimos E.
Acton, MA 01720 (US)
- Lauer, Hugh C.
Concord, MA 01742 (US)

(30) Priority: 15.07.1999 US 353673

(71) Applicant: TeraRecon, Inc., A Delaware
Corporation
San Mateo, CA 94403 (US)

(74) Representative: Pfenning, Meinig & Partner
Mozartstrasse 17
80336 München (DE)

(72) Inventors:
• Correl, Kenneth W.
Lancaster, MA 01523 (US)

(54) Method and apparatus for mapping samples in a rendering pipeline

(57) A method maps samples in a rendering pipeline. The samples are stored in a sample memory. Each sample has a plurality of fields. A descriptor is stored for each field in a field format register. Each sample is read

from the memory into a mapping unit. The fields are extracted from each sample according to the corresponding descriptor, and forwarded in parallel to the rendering pipeline.

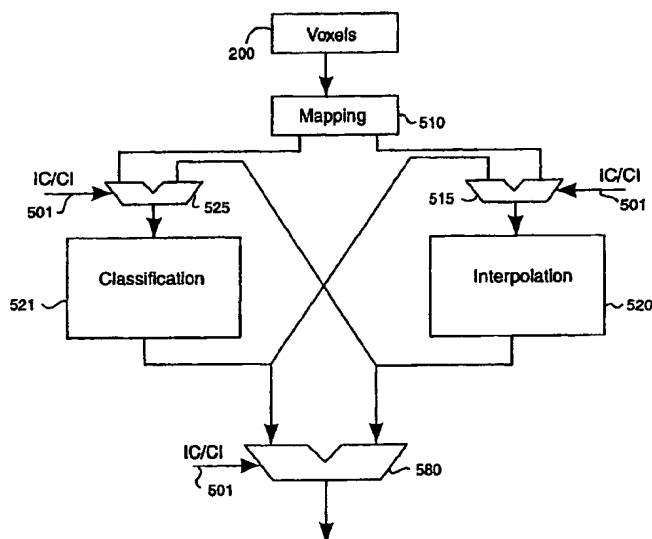


FIG. 5a

EP 1 069 528 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 11 4889

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 642 104 A (IBM) 8 March 1995 (1995-03-08) * page 4, line 10 - line 53 * -----	1,3-5, 12-19	G06T1/20 G06T15/00
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G06T
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 3 June 2003	Examiner Burgaud, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 4889

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-06-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0642104 A	08-03-1995	JP 2651787 B2	10-09-1997
		JP 7073337 A	17-03-1995
		EP 0642104 A1	08-03-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)